



LED DRIVER

High Quality & Efficiency

Super Slim & Compact

- Severe Environmental Stress Test PASS
- IP68 APPROVAL
- Type HL COMPLIANCE



■ Application:

LED Lighting System, LED Signs & Display, Commercial Lighting

■ Feature:

Wide Operating Voltage, 90 to 305 VAC (85W ~ 180W)

C.C. Mode + C.V. Mode

Output Power : 40W ~ 180W

Operating Temperature : -20°C ~ 70°C

Output Voltage : 12VDC ~ 50VDC

Over Voltage, Over Current, Over Temperature (optional)

3 year warranty

■ Safety:



40% Smaller

40% Smaller than other brands.

SINPRO

Sinpro Electronics Co., Ltd.

TEL: +886-7-396-6100


FAX: +886-7-396-6106

E-mail: sales@sinpro.com

http://www.sinpro.com



Product Selection

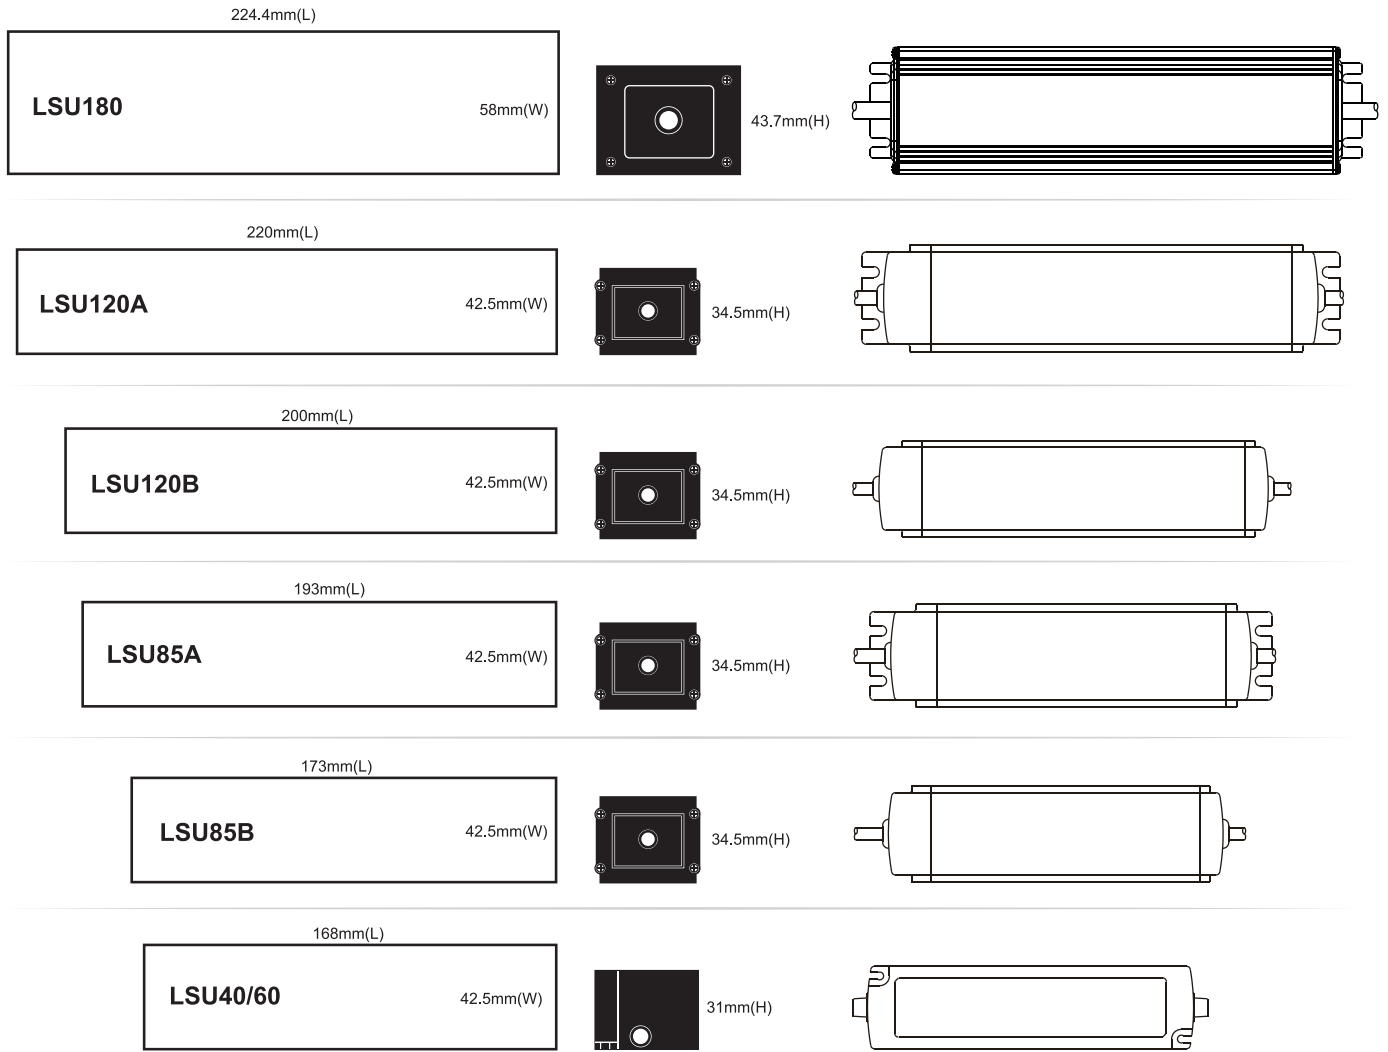

Model	Maximum Output Power (W)	Output Voltage (VDC)	Maximum Current (A)	Certificate							
				UL	Type HL	CE	CB	FCC	TUV	PSE	IP68
LSU40-105	40	12	3.33				▲		▲	▲	●
LSU40-108	40	24	1.66				▲		▲	▲	●
LSU60-105	60	11~13	5.45	●	●	●	●	●	●	●	●
LSU60-107	60	16~21	3.75	●	●	●	●	●	●	●	●
LSU60-108	60	21~27	2.85	●	●	●	●	●	●	●	●
LSU60-111	60	40~50	1.50	●		●	●	●	●		●
LSU60-112	60	50~58	1.20	●		●	●	●	●		●
LSU85X-108	85	21~27	4.04	●		●	●	●			●
LSU85X-109	85	27~33	3.14	●		●	●	●			●
LSU85X-110	85	33~40	2.57	●		●	●	●			●
LSU85X-111	85	40~50	2.12	●		●	●	●			●
LSU120X-108	120	21~27	5.71	●		●	●	●	●	●	●
LSU120X-109	120	27~33	4.44	●		●	●	●	●		●
LSU120X-110	120	33~40	3.63	●		●	●	●	●		●
LSU120X-111	120	40~50	3.00	●		●	●	●	●		●
LSU180-105	180	12	15.00				▲		▲	▲	●
LSU180-108	180	24	7.50				▲		▲	▲	●

